


PPL15-T Mineral Insulated Thermocouple with Terminal Head

Our PPL15 mineral insulated sensor is suitable for use in a wide variety of demanding applications. With a choice of thermocouple types and sheath materials almost any eventually can be catered for. We also have a choice of terminal heads available to be fitted to the sensor in which we can fit either a terminal block or transmitter. Various common options are shown on this data sheet but this is not an exhaustive list, please contact us with your requirements. Full details of the head types and accessories are available in the appropriate data sheet. UKAS or traceable calibration is available upon request.

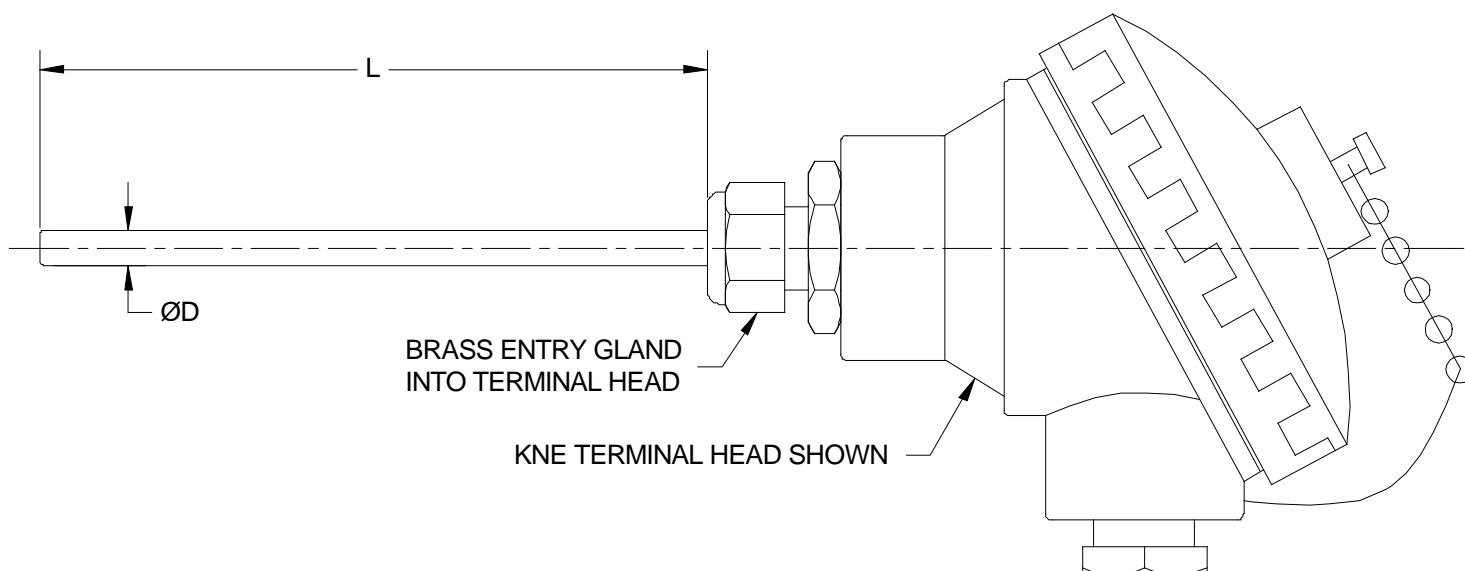


Specifications	
Sensor Type	Type J, K, T or N thermocouple.
Sheath Material	321 Stainless Steel 800°C 310 Stainless Steel 1100°C Inconel 600 1100°C Nicrobell 1250°C
Tolerance Band	BS EN 60584-2:1993 Class 1 or Class 2
Wiring System	Simplex or Duplex
Head Types	A - KNE Aluminium Alloy, IP68 B - KSE Aluminium Alloy, IP68 C - ABS, IP67 D - Glass Filled Nylon, IP65 E - 316 stainless steel, IP68 (Other heads available upon request)
Head Options	A - Ceramic Terminal Block B - In Head Transmitter—SEM203P (Specify Range) C - Tails for Customers Own Transmitter

Full details of all our products can be seen on our web-site:

www.processparameters.co.uk

PPL15-T Mineral Insulated Thermocouple with Terminal Head

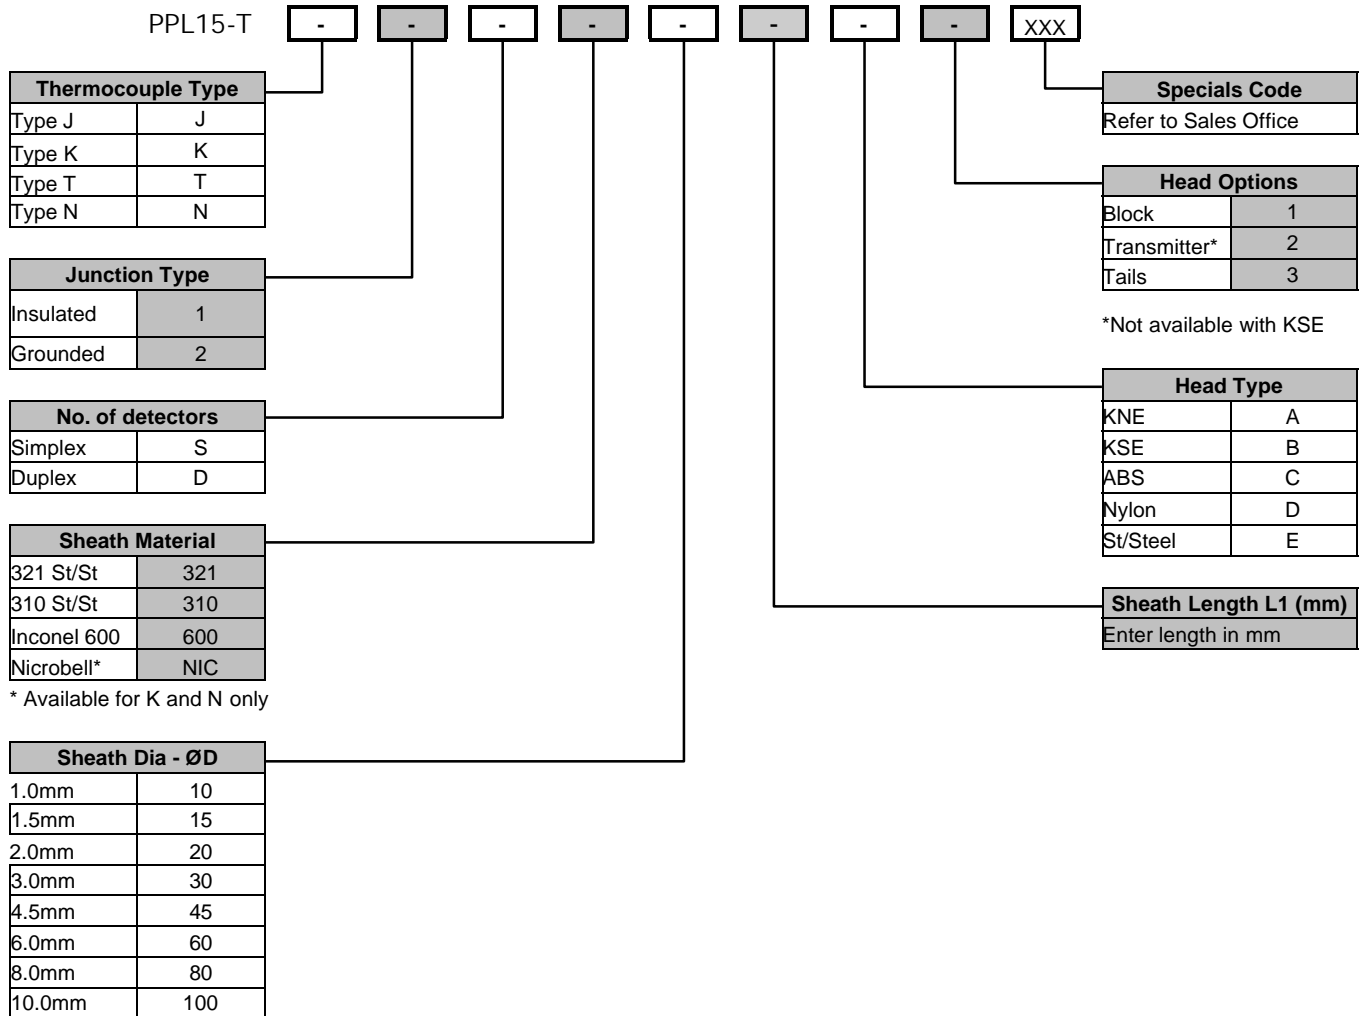

NOTE: Some sheath diameter / lead type combinations require a pot seal. Some option combinations not possible

This data sheet gives details of the most popular options available for this type of sensor but is not intended to give an exhaustive list of possibilities. If you have a special requirement, please contact our sales office for assistance.