

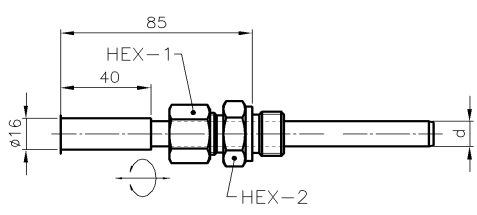
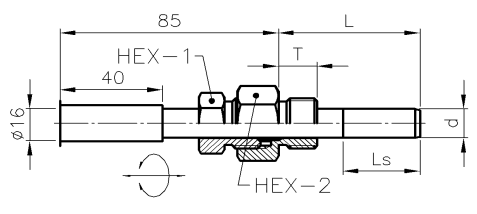
**BULB LENGTH AND DIAMETER FOR TYPE TXR-DIESEL**

TYPE	STANDARD MODEL	bulb and stem L=150 mm x Ø d AISI321/1.4541	EXTRA COSTS per 50 mm extra
<b>A</b> <i>plain stem</i>		10 and 12	
		13 and 14	
		16 and 18	

**CONNECTIONS FOR TYPE TXR-DIESEL**

TYPE	MODEL	DIMENSIONS					EXTRA COSTS
		connection	HEX-1	HEX-2	T	d max	
<b>B</b> <i>coupling nut (standard model)</i>		1/2"BSP	27	-	9	Ø 15	
		3/4"BSP	32	-	9	Ø 20	
		1"BSP	41	-	13	Ø 20	
		M18x1.5	27	-	8	Ø 12	
		M20x1.5	27	-	9	Ø 14	
		M24x1.5	32	-	9	Ø 18	
<b>BL</b> <i>coupling nut (long model)</i>		1/2"BSP	27	-	14	Ø15	
		3/4"BSP	32	-	16	Ø 20	
		1"BSP	41	-	18	Ø 20	
<b>B 01</b> <i>coupling nut + double nipple</i>	<p>THREAD BETWEEN HEX-1 AND HEX-2: 1/2"BSP</p>	1/2"BSP	27	22	14	Ø15	
		3/4"BSP	27	27	16	Ø 20	
		1"BSP	27	36	18	Ø 20	
		1/2"NPT	27	22	20	Ø 15	
		3/4"NPT	27	27	20	Ø 20	
		1"NPT	27	36	25	Ø 20	
		M18x1.5	27	22	12	Ø 12	
		M20x1.5	27	22	14	Ø 14	
		M24x1.5	27	27	14	Ø 18	

## CONNECTIONS FOR TYPE TXR-DIESEL

TYPE	MODEL	DIMENSIONS				EXTRA COSTS	
		connection	HEX-1	HEX-2	T		d max
<b>CS 3</b> adjustable connection, sliding on stem STEEL	 <p style="text-align: center;">THREAD BETWEEN HEX-1 and HEX-2: 1/2" BSP</p>	1/2" BSP only for d=Ø10 and Ø12	22	27	14	Ø 10 and Ø 12	
		3/4" BSP only for d=Ø10, Ø12 and Ø16	22	32	16	Ø 10, Ø12 and Ø16	
<b>CS 3</b> adjustable connection, sliding on stem AISI304/1.4301	 <p style="text-align: center;">THREAD BETWEEN HEX-1 and HEX-2: 1/2" BSP</p>	1/2" BSP	22	27	14	Ø 15	
		3/4" BSP	22	32	16	Ø 20	
		1" BSP	22	36	18	Ø 20	
		1/2" NPT	22	27	20	Ø 15	
		3/4" NPT	22	32	20	Ø 20	
		1" NPT	22	36	25	Ø 20	
		M18x1.5	22	27	12	Ø12	
		M20x1.5	22	27	14	Ø 14	
		M24x1.5	22	27	14	Ø 18	

**NOTE: FOR POCKETS AND THERMOWELLS; SEE PAGE 46 -**