

TEMPERATURE RECORDERS

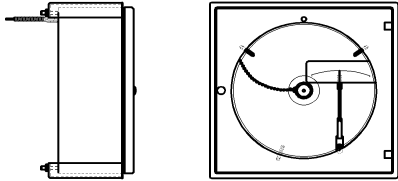
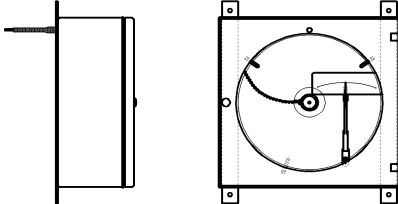
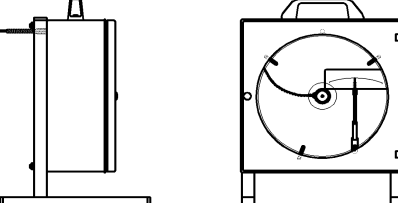
TYPE	DRAWING	DIMENSIONS mm																																			
<p>H</p> <p><i>RTCxxxXH</i></p>		<table border="1"> <thead> <tr> <th rowspan="2">DIM.</th> <th colspan="3">CASE SIZE</th> </tr> <tr> <th>192x192</th> <th>280x280</th> <th>380x380</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>185x185</td> <td>280x280</td> <td>380x380</td> </tr> <tr> <td>B</td> <td>119</td> <td>119</td> <td>125</td> </tr> <tr> <td>C</td> <td>80 down*</td> <td>120</td> <td>172 down*</td> </tr> <tr> <td>D</td> <td>197x197</td> <td>293x293</td> <td>418x418</td> </tr> </tbody> </table> <p>* capillary lower back entry</p>	DIM.	CASE SIZE			192x192	280x280	380x380	A	185x185	280x280	380x380	B	119	119	125	C	80 down*	120	172 down*	D	197x197	293x293	418x418												
DIM.	CASE SIZE																																				
	192x192	280x280	380x380																																		
A	185x185	280x280	380x380																																		
B	119	119	125																																		
C	80 down*	120	172 down*																																		
D	197x197	293x293	418x418																																		
<p>B</p> <p><i>RTCxxxXB</i></p>		<table border="1"> <thead> <tr> <th rowspan="2">DIM.</th> <th colspan="3">CASE SIZE</th> </tr> <tr> <th>192x192</th> <th>280x280</th> <th>380x380</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>185x185</td> <td>280x280</td> <td>380x380</td> </tr> <tr> <td>B</td> <td>122</td> <td>122</td> <td>125</td> </tr> <tr> <td>C</td> <td>80 down*</td> <td>120</td> <td>172 down*</td> </tr> <tr> <td>D</td> <td>189x189</td> <td>283x283</td> <td>418x418</td> </tr> <tr> <td>E</td> <td>252</td> <td>335</td> <td>470</td> </tr> <tr> <td>P1</td> <td>222</td> <td>305</td> <td>440</td> </tr> <tr> <td>P2</td> <td>152</td> <td>247</td> <td>440</td> </tr> </tbody> </table> <p>* capillary lower back entry</p>	DIM.	CASE SIZE			192x192	280x280	380x380	A	185x185	280x280	380x380	B	122	122	125	C	80 down*	120	172 down*	D	189x189	283x283	418x418	E	252	335	470	P1	222	305	440	P2	152	247	440
DIM.	CASE SIZE																																				
	192x192	280x280	380x380																																		
A	185x185	280x280	380x380																																		
B	122	122	125																																		
C	80 down*	120	172 down*																																		
D	189x189	283x283	418x418																																		
E	252	335	470																																		
P1	222	305	440																																		
P2	152	247	440																																		
<p>T</p> <p><i>RTCxxxXT</i></p>		<table border="1"> <thead> <tr> <th rowspan="2">DIM.</th> <th colspan="3">CASE SIZE</th> </tr> <tr> <th>192x192</th> <th>280x280</th> <th>380x380</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>185x185</td> <td>280x280</td> <td>380x380</td> </tr> <tr> <td>B</td> <td>141</td> <td>141</td> <td>125</td> </tr> <tr> <td>C</td> <td>80 down*</td> <td>120</td> <td>172 down*</td> </tr> <tr> <td>D</td> <td>189x189</td> <td>283x283</td> <td>418x418</td> </tr> <tr> <td>E</td> <td>188</td> <td>260</td> <td>280</td> </tr> <tr> <td>F</td> <td>260</td> <td>354</td> <td>465</td> </tr> </tbody> </table> <p>* capillary lower back entry</p>	DIM.	CASE SIZE			192x192	280x280	380x380	A	185x185	280x280	380x380	B	141	141	125	C	80 down*	120	172 down*	D	189x189	283x283	418x418	E	188	260	280	F	260	354	465				
DIM.	CASE SIZE																																				
	192x192	280x280	380x380																																		
A	185x185	280x280	380x380																																		
B	141	141	125																																		
C	80 down*	120	172 down*																																		
D	189x189	283x283	418x418																																		
E	188	260	280																																		
F	260	354	465																																		

SECUTHERM® TEMPERATURE RECORDERS

Type RTC, with capillary

STANDARD MODEL:

CASE	: stainless steel AISI316/1.4401	CHARTS	: 50 pcs, Ø166mm for 192x192mm, Ø223 for 280x280mm Ø300 for 380x380mm
WINDOW	: plexiglass	STEM & BULB	: see page 26 - 28
DIAL	: transparent with black figures	CAPILLARY	: see page 25
PEN OPERATION	: single or double-pen (option), writing with long-life fiber pens on disc	CONNECTION	: see page 26 -28
CLOCKWORK	: mechanical spring wound, 1-, 4-, 12-, 24 hours or 7 day rotation, with start/stop button. Electric clockworks on demand. Switchable clockworks on demand.	MOVEMENT	: brass
		ACCURACY	: ±1%F.S./class 1
		OPTIONS	: double pen writing combination temperature / pressure

TYPE	SQUARE MODELS	CASE DIMENSIONS (in mm)		
		192x192 mm	280x280 mm	380x380 mm
H PANEL MOUNTING		RTC192x192XH	RTC280x280XH	RTC380x380XH
B SURFACE MOUNTING		RTC192x192XB	RTC280x280XB	RTC380x380XB
T TRANSPORTABLE		RTC192x192XT	RTC280x280XT	RTC380x380XT
OPTIONS (see also page 19)		CASE DIMENSIONS (in mm)		
		192x192 mm	280x280 mm	380x380 mm
RTC-DUPLEX	DOUBLE MEASURING SYSTEM (calculate also 2x capillary and bulb)			
CHARTS	Ø166, Ø223 or Ø300mm PER 100 PCS.			
SPARE PENS	PER 5 PCS, black, red or blue			